

Technical Note N°2 - Pre 62' E Type / Period E

Specific technical regulations 2022

| | Period E – FIA Form 34 | Notes |
|-------------------------------|--------------------------------------|---|
| Minimum weight | 1118kg | Maximum ballast 30kg |
| Wheels diameter | 5 ½ FR – 5 ½ RE – Wire wheels only | Maximum 15in |
| Brakes/Calipers | Standard 2 pistons Dunlop MK2 | • FR 53.9mm (2 1/8inch) |
| | | • RE 44.45mm (1 ¾ inch) |
| Front Disc Brake Diameter | 279mm | Non ventilated solid discs |
| Rear Disc Brake Diameter | 254mm | Non ventilated solid discs |
| Maximum front track | 127cm | |
| Maximum rear track | 129,5cm | |
| Ground clearance/ Ride height | 100mm | Art. 4.6 Sixties' Endurance Regulation |
| Maximum capacity / Stroke | 3885cc / 106mm | |
| Intake | 3 x SU HD8 | |
| Ignition | Contact breaker/coil, mechanical | Electronic ignition are forbidden |
| | Advance retard only | |
| Heads | Standard straight head | |
| Engine bloc material | Cast iron | Aluminium forbidden |
| | | Helical-toothed gears only, |
| Gearbox | Moss or Jaguar 4 speed | operational synchromesh |
| | | ZF 5 speed are forbidden |
| Dampers | Steel non adjustable | Alloy dampers are forbidden |
| | non threaded dampers | |
| Exhaust manifolds | Must comply with the original design | See picture page 2 |
| Differential | steel Salisbury | Discs self locking only |
| Rear axle material | Cast iron | Alloy/Magnesium are forbidden |
| Gearbox material | Cast iron | Alloy/Magnesium are forbidden |
| Bodywork | Steel | |










Dunlop Mk2 Caliper

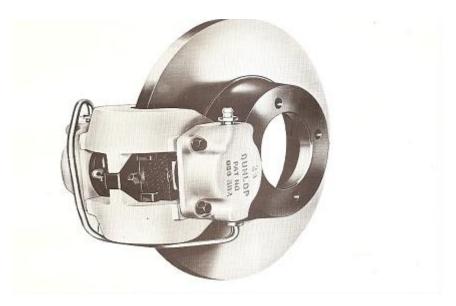

Exhaust Manifold

